



For
TEXTILES &
APPAREL

Water-based sublimation transfer inkjet printer
TS55-1800

Mimaki™

Software

TxLink4 Lite Edition or RasterLink6PLUS is bundled according to user's request.



Specifications

Item		TS55-1800
Print head		Head Assy Stagger layout
Print resolution		480 dpi, 600 dpi, 1,200 dpi
Maximum print width		1,940 mm (76.4 in)
Maximum media width		1,950 mm (76.8 in)
Rolled media weight		45 kg (99.2 lb)
Ink slot		8
Ink	Type/Color	Sb610 (B/Y/M/K/Lbl/Lm/Lk/Fy/Fp) *1
	Capacity	2L ink pack
Safety standard		VCCI-Class A, FCC-Class A, UL 60950, CE Marking (EMC, Low Voltage Directive, Machinery Directive, RoHS Directive) CB Report, RoHS, ENERGY STAR, RCM, EAC
Interface		USB 2.0 Hi-speed, Ethernet 1000BASE-T
Power		Single phase AC 100-120 V/AC 200-240 V x 1
Power consumption		(AC 100 V) 1.44 kW (AC 200 V) 1.92 kW or less
Operational environment		Temperature: 20-30 degC (68-77 degF) Humidity: 35-65% Rh (Non condensing)
Outside dimensions (W x D x H)		3,240 x 713 x 1,857 mm (127.6 x 28.1 x 73.1 in)
Weight		202 kg (445.3 lb)

*1 Lk, Fy, and Fp are to be available later.

Option

Item		Mini-jumbo roll unit
Roll media size		Max. weight: Winding 100 kg (220.5 lb) / Feeding 300 kg (661.4 lb) Max. diameter: Winding 290 mm (11.4 in) / Feeding 600 mm (23.6 in) Max. width: 1,910 mm (75.1 in) Max. printable width: 1,900 mm (74.8 in)
Power		Single phase AC 200-240 V x 1
Power consumption		(AC 200 V) 1.0 kW or less
Outside dimensions (W x D x H)		Unit size: 2,770 x 905 x 600 mm (109.1 x 35.7 x 23.7 in) Size with the main unit: 3,240 x 1,850 x 1,857 mm (127.6 x 72.9 x 73.2 in)
Weight		100 kg (220.5 lb)

Item		10kg Ink supply unit
Ink set		4-colors/6-colors/7-colors/8-colors *2
Ink	Type/Color	Sb610 (B/Y/M/K/Lbl/Lm/Lk/Fy/Fp)
	Capacity	10 kg ink tank (Per color) Lk, Fy and Fp are supplied by 2L pack
Outside dimensions (W x D x H)		Unit size: 824 x 1,035 x 383 mm (32.4 x 40.7 x 15.0 in) Size with the main unit: 4,108 x 1,035 x 1,484 mm (161.7 x 40.7 x 58.4 in)
Weight		35 kg (77.2 lb)

*2 The 6C, 7C and 8C are to be available later.

Item		Extended heater
Power		Single phase AC 100-120 V/AC 200-240 V x 1
Power consumption		(AC 100 V) 1.0 kW or less / (AC 200 V) 1.0 kW or less
Outside dimensions (W x D x H)		Unit size: 2,336 x 108 x 236 mm (92.0 x 4.3 x 9.3 in) Size with the main unit: 3,240 x 775 x 1,857 mm (127.6 x 30.6 x 73.2 in)
Weight		15 kg (33.1 lb)

Supply

Item	Item code	Description
Sublimation transfer ink Sb610 2L Pack	SB610-BLT-2L	2,000 ml pack
	SB610-YT-2L	
	SB610-MT-2L	
	SB610-KT-2L	
	SB610-LBT-2L	
	SB610-LMT-2L	
	SB610-LKT-2L	
	SB610-FYT-2L	
	SB610-FPT-2L	
	Sublimation transfer ink Sb610 10 kg Bottle	
SB610-YT-BJ		
SB610-MT-BJ		
SB610-KT-BJ		
SB610-LBT-BJ		
SB610-LMT-BJ		

		Celupal Worldwide Industries Tel: 01 561 203 2149 info@celupal.com		Corporativo Tel.: +52 (55) 2625 2990 info@celupal.com		Celupal Monterrey Tel.: +52 (81) 1936 6074 monterrey@celupal.com		Sucursal Toluca Tel.: +52 (722) 283 1039 toluca@celupal.com		Sucursal Querétaro Tel.: +52 (442)340 7722 queretaro@celupal.com			
Sucursal Guadalajara Tel.: +52 (33) 3619 5046 guadalajara@celupal.com		Sucursal Mérida Tel.: +52 (999) 946 0908 merida@celupal.com		Sucursal Algarín Tel.: +52 (55) 5530 4456 algarin@celupal.com		Sucursal Chihuahua Tel.: +52 (614) 417 0071 chihuahua@celupal.com		Sucursal Puebla Tel.: +52 (222) 222 74 17 puebla@celupal.com		Sucursal Cancún Tel.: +52 (998) 206 8489 cancun@celupal.com		Celupal de Honduras Tel.: +504 (25) 04 7987 honduras@celupal.com	

●Some of samples in this catalogue are artificial renderings. ●Specifications, design and dimensions stated in this catalogue may be subject to change without notice for technical improvements etc.
●The corporate names and merchandise names written in this catalogue are the trademark or registered trademark of the respective corporations. ●Inkjet printers print using extremely fine dots, so colors may vary slightly after replacement of print heads. ●Also note that if using multiple printer units, colors could vary slightly from one unit to other (s) due to slight individual differences. ●The specifications described in this catalog are as of December 2018.


Mimaki MIMAKI ENGINEERING CO., LTD.
2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan
Tel. +81-268-64-2281

Mimaki Global Network

USA	MIMAKI USA, INC.	Europe	MIMAKI EUROPE B.V.
Brazil	MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA	Indonesia	PT. MIMAKI INDONESIA
India	MIMAKI INDIA PRIVATE LIMITED	Australia	MIMAKI AUSTRALIA PTY. LTD.
Taiwan	MIMAKI ENGINEERING (TAIWAN) CO.,LTD.	China	SHANGHAI MIMAKI TRADING CO.,LTD.
Singapore	MIMAKI SINGAPORE PTE. LTD.		




The evolution
of production printing

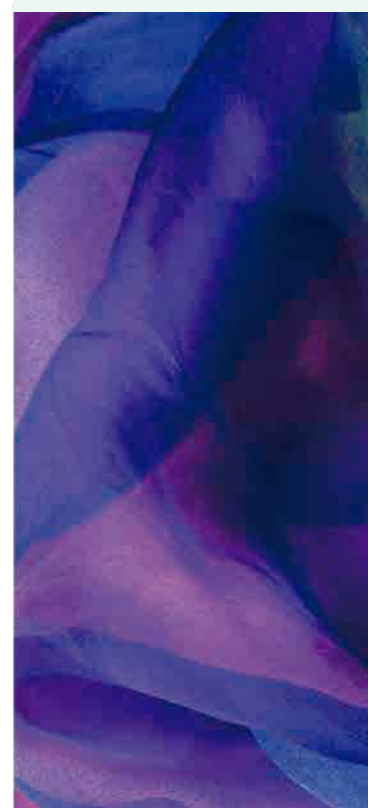

TS55-1800

The "TS55-1800" is a revolutionary sublimation transfer inkjet printer for apparel/textile achieving high-speed printout of up to 140 sqm/h (1,506 sq.ft/h), superior functionality and convenient options suited for stable, long-term printout sessions at reduced cost.

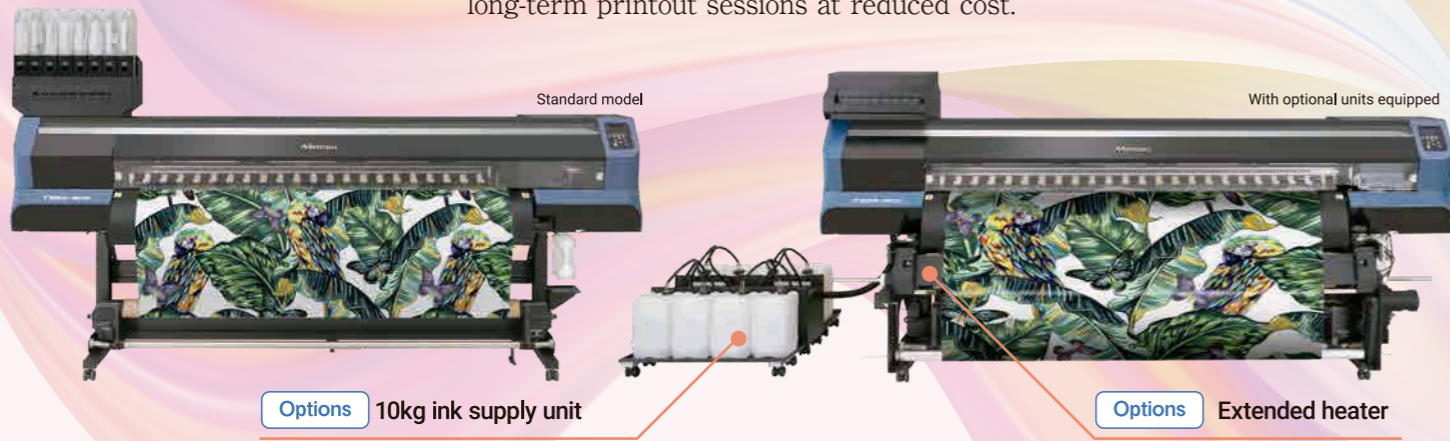

Options 10kg ink supply unit

Options Extended heater

Options Mini-jumbo roll unit



Rear view with optional units equipped

Options aiming for cost reduction

Mini-jumbo roll unit corresponding to high-speed, high-volume demands

This is a feeding unit to load the "Mimaki Vision Jet-X" transfer paper with a length of about 2,500 m (8,202 ft). It reduces the cost per square meter and shortens the downtime due to media replacement, when compared with the case using the previous 150 m (492 ft) -long transfer paper.



"Mimaki Vision Jet-X" mini-jumbo rolls featuring approximately 2,500 m (8,202 ft) of transfer paper announced concurrently with model "TS55-1800".

Previously, the "TS55-1800" printer running at its maximum speed (140 sqm/h; 1,506 sq.ft/h) using a 150 m (492 ft) roll of transfer paper was incapable of coping with extended continuous operation such as all-night sessions in the absence of operators. The combination of "Mimaki Vision Jet-X" and the mini jumbo roll allows for extended printout sessions unattended. The mini jumbo roll also contributes to reducing the running cost of printer systems with lower per-square meter unit price in comparison to smaller rolls.



Extended heater supporting stable operation

The extended heater attached to the lower portion of the standard heater facilitates the drying of high-speed printing results.



10kg ink supply unit corresponding to extended successive printing jobs

Equipment of the large quantity of 10kg (22 lb) ink tank enables long-term successive operations such as over-night printout sessions. The tank achieves significant reductions in running cost and operation time over the standard 2 liter pack cartridges.




Providing for high productivity

Maximum printout speed mode 140 sqm/h (1,506 sq.ft/h) /Standard quality mode 55 sqm/h (592 sq.ft/h)

Adoption of the newly developed print heads ensures high-quality print even at a high speeds, achieving 140% productivity over our conventional model (TS300-1800) with standard quality mode printing at 55 sqm/h (592 sq.ft/h). By newly enabling the use of "MAPS" function in high-speed mode (70 sqm/h; 753 sq.ft/h) printing, TS55-1800 achieves excellent image quality even with high speed printing.

Print head configuration and layout

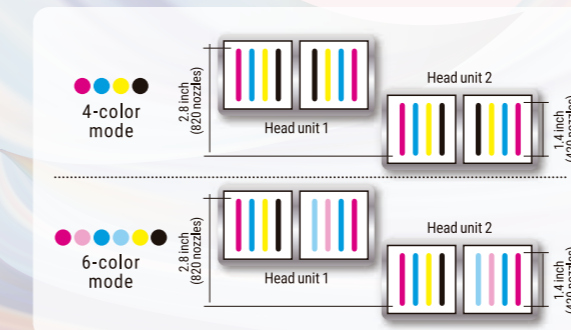

Technologies for uninterrupted reliable printing operations

"MAPS" functionality reduces banding

In ordinary textile printers, the straight pass boundaries often results in bandings and discoloration due to slight misalignment. The "MAPS (Mimaki Advanced Pass System)" functionality provides gradation to printed pass boundaries and maintains stable print quality by reducing banding and uneven color.

MAPS functional image



MAPS: OFF

MAPS: ON


Comparison of printout between same image quality requirements

Approx. 140% superior to conventional model*1 [standard mode]
TS55-1800 55 sqm/h 4-color 600 x 600 dpi 2P/TS300P-1800 38 sqm/h 4-color 720 x 720 dpi 4P High

*1 Comparative printout speed

Minimization of NCU/NRS downtime

Incorporates Mimaki's unique automatic nozzle check unit ("NCU"). When the NCU detects a missing nozzle, it automatically performs cleaning to solve the problem. If the missing nozzle remains unresolved after cleaning, printing is commenced upon switching to an alternate nozzle. The print can be restarted to maintain productivity, without the need to wait for a service representative.

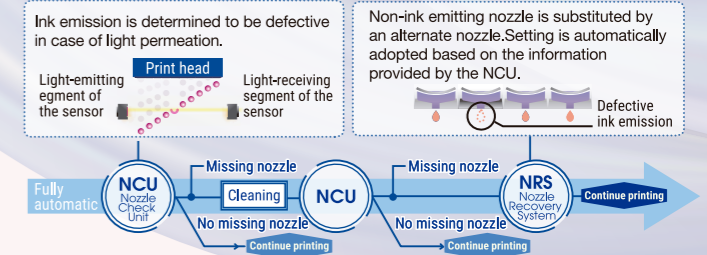

Guaranteed beauty

Sophisticated Textile RIP software, "TexLink4 Lite Edition"


New functions were incorporated into the professional "TxLink" RIP software. "16-bit rendering", "Parallel RIP function" and "load balancing function"

Parallel RIP and load balancing functions make production more efficient.

The RIP process for multiple pieces of print data can be performed in parallel. In addition, thanks to the load balancing function for print jobs, jobs can be assigned to printers automatically, allowing efficient production when multiple printers are connected.*2


Parallel RIP function

RIP processes can be performed in parallel, making production that uses multiple printers*1,2 efficient. The parallel process function can handle up to 8 jobs.

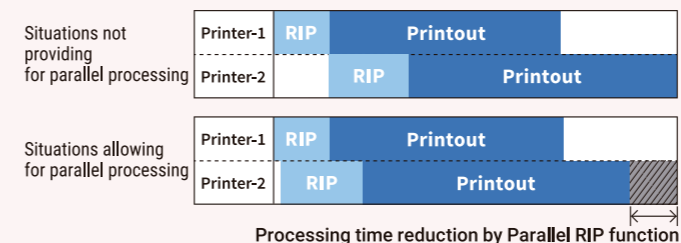

Processing time reduction by Parallel RIP function

16-bit rendering*3 achieves beautiful gradation expression.

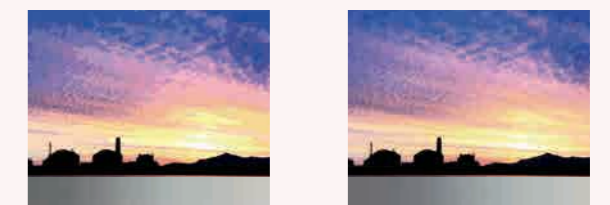


TxLink3 8-bit rendering

TxLink4 16-bit rendering

*3 8-bit rendering is used depending on the file format or color space.

Load balancing function

Print jobs are pooled and automatically assigned to multiple printers*1,2 (Round Robin system)

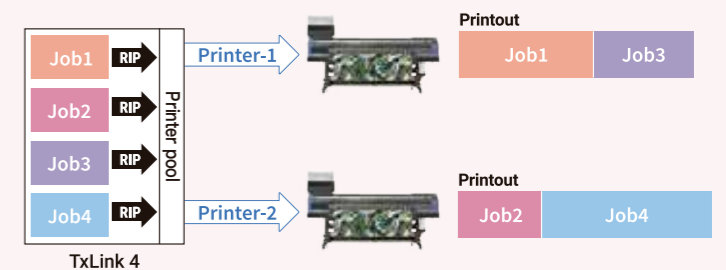

*1 Identical printers/identical ink-set printers. *2 Additional printer licenses corresponding to the number of connected printers are required.