


VVLAM-1700MCH Pneumatic Single-side Full-auto Hot and Cold laminator

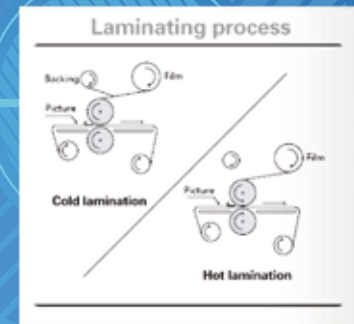

Optimum performance:

- Hight quality top-heated silicon rollers ensures heavy-duty works
- Adjustable settings for increased capacity and versatility
- Fast processing with a speed up to 7m /min
- Unique anti-tilt and anti-fold system ensures clear output
- Fully adjustable nip-gap and pressure for precise application

Ease of use:

- Automatic fully adjustable pressure and nip gap
- Simple film tension adjustment
- Light weight drop-in supply shafts withaoto-grip for easy loading
- Roll-to-Roll operation capacity
- Foot pedal switch for pieces accurate application

Product Specifications:

Parameter	VVLAM-1700MCH
Max lamination width	1630 mm / 64"
Max lamination thickness	28 mm / 1.1"
Max Speed	7 m / min
Max temp	150°C / 302°F
Up and Down	Air cylinder
Heating	Infrared
Warm up time	15-20 min
Power input	2200w
Volt	110V / 220V
N.W	220kg