



○ ● ● ● DISTRIBUIDOR LÍDER EN PAPELES, PLOTTERS E INSUMOS

WV LAM FLATBED APPLICATOR

NOT AVAILABLE FOR THE U.S.

Flatbed laminator for signage and graphic



CONTACTO

<p>Corporativo (55) 2625 2990 01800 000 CELU info@celupal.com</p>	<p>Sucursal Toluca (722) 283 1039 (722) 437 6202 toluca@celupal.com</p>	<p>Sucursal Querétaro (422) 340 7722, 23 (422) 340 7080 queretaro@celupal.com</p>	<p>Sucursal Monterrey (81) 1936 6074 monterrey@celupal.com</p>	<p>Sucursal Guadalajara (33) 3619 5046 guadalajara@celupal.com</p>
<p>Sucursal Mérida (998) 946 0908 merida@celupal.com</p>	<p>Sucursal Algarín (55) 5530 4456 (55) 5519 2189 algarin@celupal.com</p>	<p>Sucursal Chihuahua (614) 417 0071 chihuahua@celupal.com</p>	<p>Sucursal Puebla (222) 222 9416 (222) 222 7417 puebla@celupal.com</p>	<p>Sucursal Cancún (998) 206 8489 cancun@celupal.com</p>



WV LAMFLAT-1325V1/1732V1




Product Features

- Variable pressured silicon roller locks the substrates into place
- Time saving compared to traditional application methods
- Fully adjustable nip-gap and pressure for precise application
- Suitable for Flexible signs, self-adhesive application and rigid panels etc
- Illuminated table surface is ideal for use with multi-coloured or translucent graphics

Ease of use

- Roller can be automatically adjusted in height to accommodate different substrates
- Side trays for easier application onto banners
- Infrared temperature control system provides accurate temperature for different medias

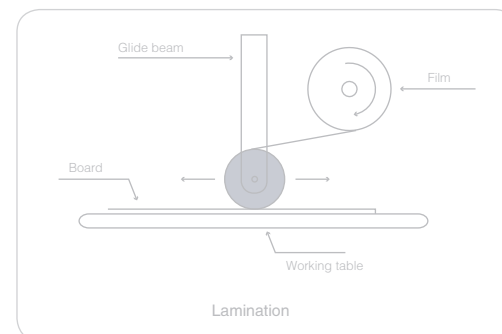

Technical Parameters

Parameter	1325v1	1732v1
Size (working area)	1300*2500mm	1700*3200mm
Max lamination width	1.3m	1.7m
Max lamination length	2.5m	3.2m
Max working Thickness	50mm	
Up and Down	Air cylinder	
Warm up time	5-10min	
Working type	Manual	
Power	2200W	
Heated method	Infrared	
Volt	110/220v	
Side trays	YES	