

**VLAM** PNEUMATIC SINGLE-SIDE  
 FULL-AUTO HEAT-ASSIST COLD LAMINATOR

### Performance

Patented Feeding and Film roll system brings you a new experience of lamination

Top-heated silicon rollers ensures heavy-duty output

Adjustable settings for increased capacity and versatility

### Ease of use

Patented feeding and Film roll system, easier of loading and faster for operating


Fully adjustable nip-gap and pressure for precise application

Roll-to-Roll and Piece-to-Piece operation capacity

### Safety

Foot switch for hands free operation

Laser safety eyes and 2 emergency stops  
 CE,ROHS,RCM

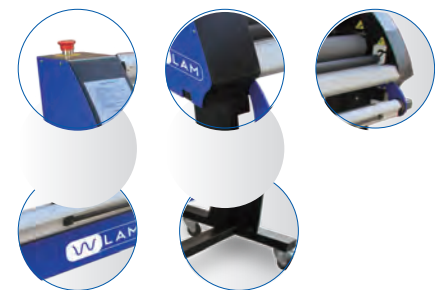

**VLAM-1700SC**

### Technical Parameters

Parameter	MF1700-M1+
Max lamination width	1630mm/64"
Max lamination thickness	23mm/0.9"
Max Speed	6m/min
Max temp	60℃ /140 ℉
Up and Down	Lifting link
Heating	Infrared
Warm up time	5-10 min
Power consumption	0.5-0.8 kw/h
Power input	1400w
Volt	110V/220V
N.W	150kg

## CONTACTO

Corporativo (55) 2625 2980 01800 000 CELU info@celupal.com	Sucursal Toluca (722) 283 1039 (722) 437 6202 toluca@celupal.com	Sucursal Querétaro (422) 340 7722, 23 (422) 340 7080 queretaro@celupal.com	Sucursal Monterrey (81) 1936 6074 monterrey@celupal.com	Sucursal Guadalajara (33) 3619 5046 guadalajara@celupal.com
Sucursal Mérida (999) 946 0908 merida@celupal.com	Sucursal Algarín (55) 5530 4456 (55) 5519 2189 algarin@celupal.com	Sucursal Chihuahua (614) 417 0071 chihuahua@celupal.com	Sucursal Puebla (222) 222 9416 (222) 222 7417 puebla@celupal.com	Sucursal Cancún (998) 206 8489 cancum@celupal.com