


innovate... laminate

The Easymount™ double hot roller system gives you total flexibility to mount, laminate and encapsulate



EM-1650DH

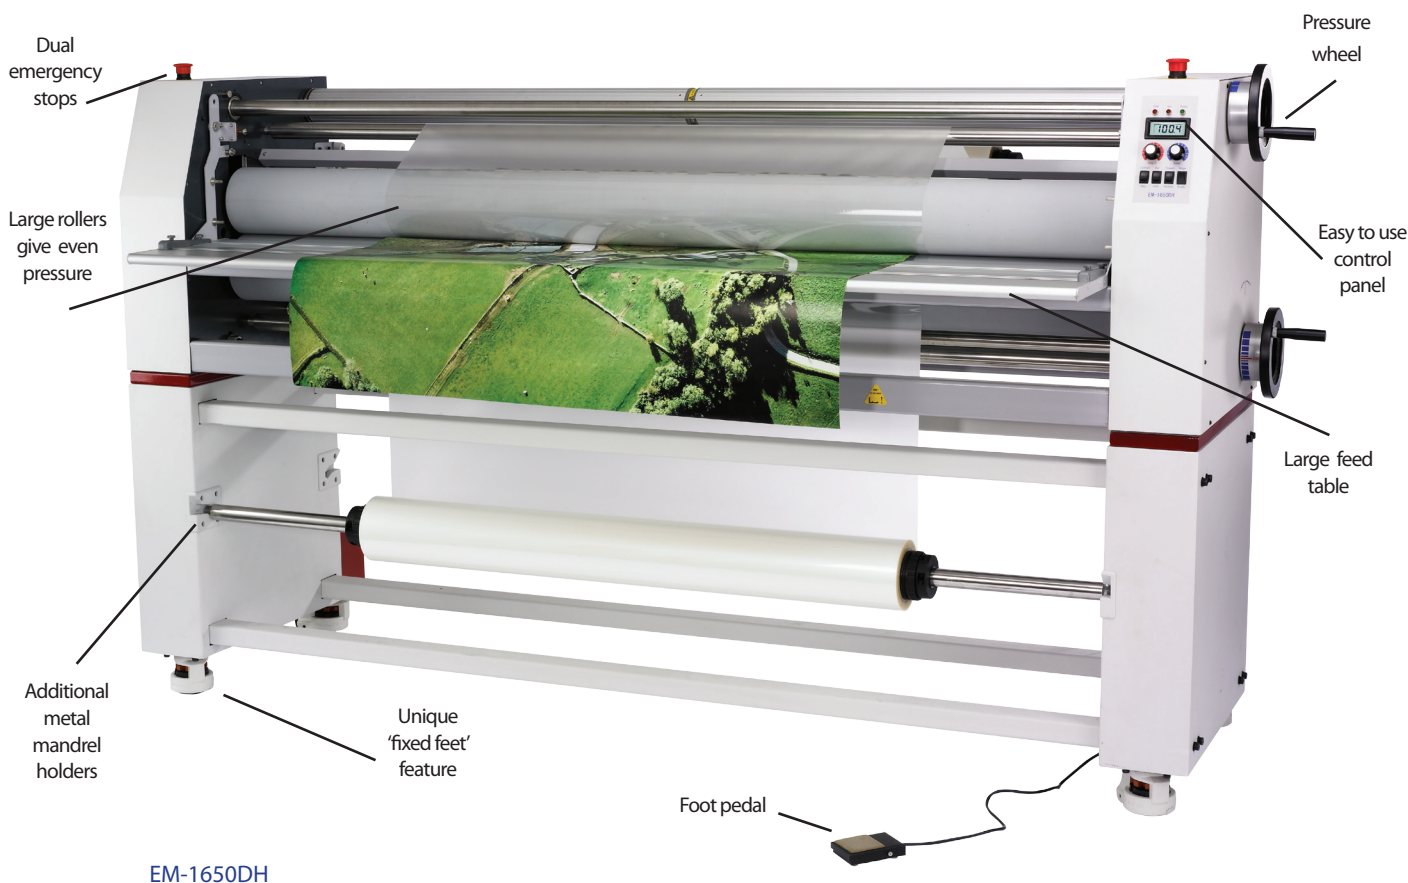

Reverse Feature



Speed Control



Temperature Control



## Design

With advanced features and a new design, the Easymount™ is capable of delivering premium quality results for graphics and signage material.

## Performance

There are 2 models to choose from in the range, the 1180 or 1650, both of which can competently produce a highly efficient 3.9 metres per minute.

## Enhancements

Many features have been enhanced on the models including additional mandrel holders for storing spare rolls and a larger feed table for easy material loading.

### IDEALLY SUITED FOR

- cold laminates (pressure sensitive)
- encapsulating film
- mounting prints to boards
- applying vinyls
- application tapes
- applying adhesive films

and many more...

### GREAT FOR USE IN

- commercial printers
- copy and print shops
- exhibition graphics
- reprographic bureaus
- sign makers

# EASYMOUNT™ DH

## EM-1180DH / EM-1650DH

### FEATURES

- hot & cold mounting, laminating and encapsulating
- solid construction heavy duty system
- independently heated top or bottom roller
- take up mandrel for release liner paper
- variable speed control
- large rollers for even pressure
- handy reverse mechanism
- low maintenance
- foot pedal for added control

EM-1650DH



### specifications

	EM-1200DH	EM-1650DH
approx laminating speed (m/min)	3.9	3.9
maximum width (mm)	1180 (46")	1650 (64")
mounting thickness (mm)	25	25
roller diameter (mm)	110	131
warm-up time (mins)	10	20
hot roller heater system	internal infrared	internal infrared
laminating temperature (°C)	30-130°	30-130°
speed/temp control	dial keypad	dial keypad
pressure adjustment	manual	manual
film core (mm)	75	75
power supply AC (V-Hz)	220/240-50-60 (30 amp supply required)	220/240-50-60 (32 amp supply required)
power consumption (W)	3950	5150
dimensions (mm) with stand	1700 x 785 x 1265	2170 x 785 x 1265
gross machine weight (kg)	270	366
gross stand weight (kg)	92	108
warranty (year)	1	1



Vivid Laminating Technologies Ltd

Call +44 (0) 845 1 30 40 50

St. Georges House, Whitwick Road, Coalville, Leicestershire, LE67 3FA, United Kingdom  
WEB [www.vivid-online.com](http://www.vivid-online.com) EMAIL [sales@vivid-online.com](mailto:sales@vivid-online.com) FAX +44 (0) 845 1 30 70 80

E&O.E